

HUBER+SUHNER® DATA SHEET

SENCITY® ACCESSORY

FOR PLANAR ANTENNA

Rev: H



Down_Sidetilt Bracket 9091.99.0168

| Type no. | Article no. | Mast diameter | Band width |
|--------------|-------------|-----------------------------|-----------------|
| 9091.99.0168 | 23028430 | 54 - 100 mm (2.13" - 3.94") | 14.0 mm (0.55") |

Metal bands included in the antenna shipment (not in the side-/downtilt bracket shipment)

Side-/downtilt angle

Sidetilt ± 45°

Downtilt ± 30°


| Documents | |
|------------|----------------------|
| 01.02.0970 | mounting instruction |



Mounting Bands (optional)

| Type no. | Article no. | Mast diameter | Band width |
|--------------|-------------|------------------------------|-----------------|
| 9091.99.0074 | 22652587 | 50 - 370 mm (1.97" - 14.57") | 9.0 mm (0.35") |
| 9091.99.0075 | 22652633 | 92 - 140 mm (3.62" - 5.51") | 14.0 mm (0.55") |
| 9091.99.0092 | 23002846 | 54 - 100 mm (2.13" - 3.94") | 14.3 mm (0.56") |

| Documents | |
|------------|----------------------|
| 01.02.0777 | security instruction |

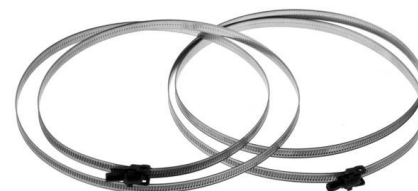

HUBER+SUHNER is certified according to ISO 9001 and ISO 14001

WAIVER!

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.



HUBER+SUHNER AG
RF Industrial
9100 Herisau, Switzerland
 Phone +41 (0)71 353 41 11
 Fax +41 (0)71 353 45 90
www.hubersuhner.com

HUBER+SUHNER – Excellence in Connectivity Solutions